

ALMA & AQUA MIX



SOUND
INSULATION



FIRE RATING:
EI2.30



AUTOMATIC



SEVERAL
FINISHES



GLASS



PRIVATE







PAQUEBOT, SWITZERLAND - ALMA & AQUA MIX











PCTS HEADQUARTERS, PORTUGAL - ALMA & AQUA MIX




PCTS HEADQUARTERS, PORTUGAL - ALMA & AQUA MIX


**MAKE YOUR
OWN MIX**

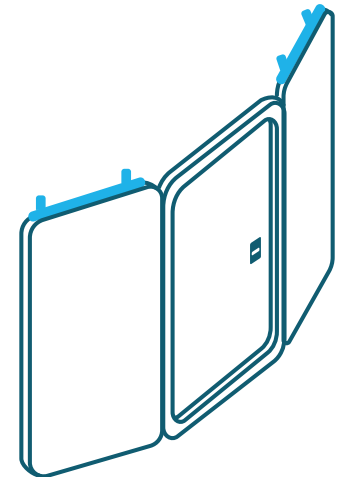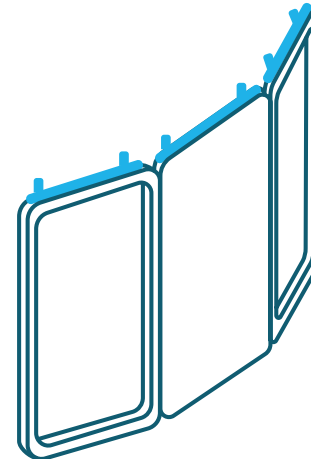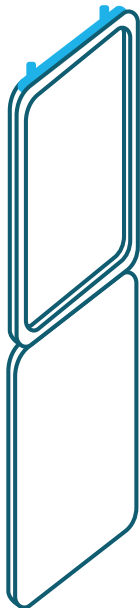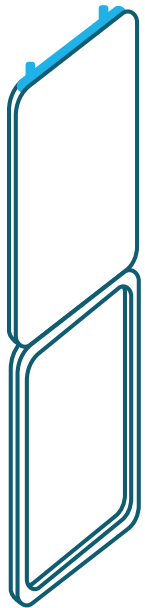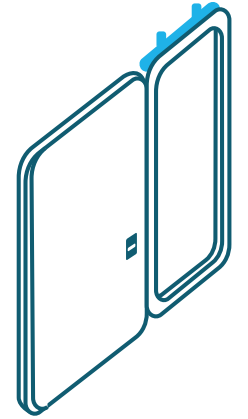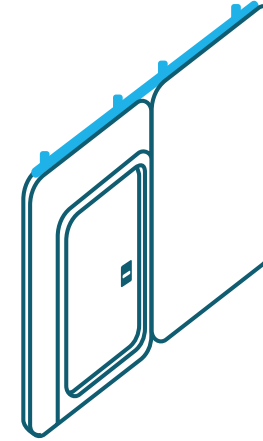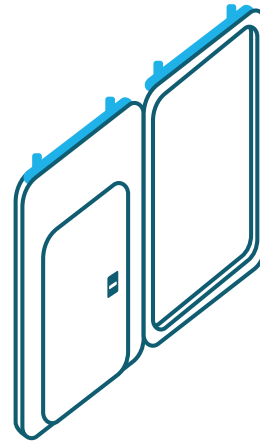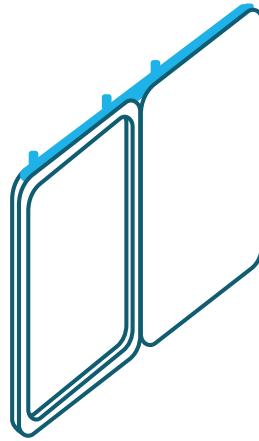


SUSPENSIONS




CONCRETE




BENT PLATE

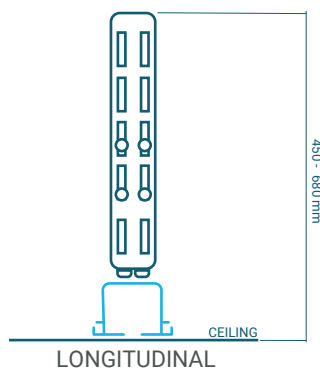


LONGITUDINAL

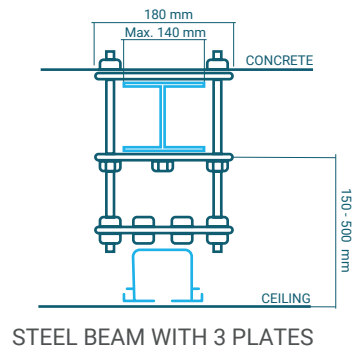

STEEL BEAM WITH 3 PLATES




DIRECT

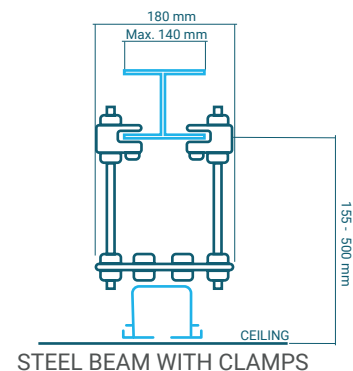


STEEL BEAM WITH CLAMPS

CEILING TRACK

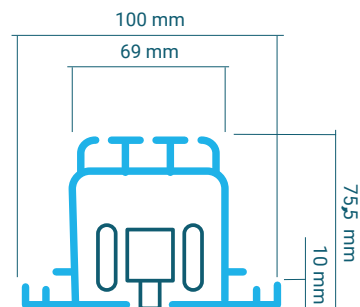


TRACK TYPE UD Uni-Directional

Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 358Kg per panel.

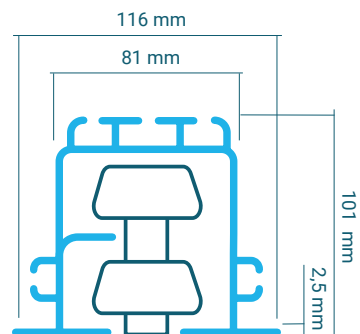

TRACK TYPE MDS Standard Multi-Directional

Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 453Kg per panel.

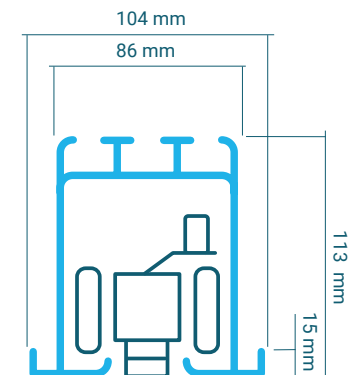

TRACK TYPE MDH Heavy Duty Multi-Directional

Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 850Kg per panel.